


MICHELIN X[®] TWEEL[™] TMF AIRLESS RADIAL TIRE

**PROPER INSTALLATION INSTRUCTIONS
FOR TRUCK-MOUNTED FORKLIFTS**



Star Pattern
Sequence for
Tightening
Lug Bolts

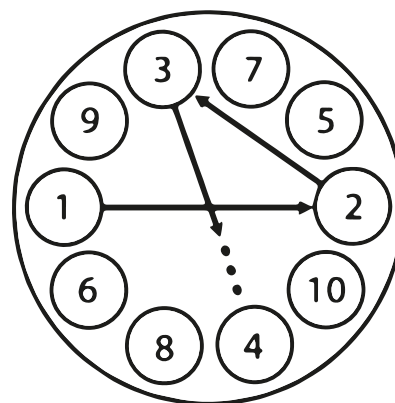

10-Bolt Hub

ACTION REQUIRED

- Michelin X[®] Tweel[™] tires bolt directly on the machine with standard mounting bolts.
 - Use only MOFFET M14-1.50 Wheel Nuts (Hiab MOFFET Part Number 503.055.0345).
 - Hand tighten wheel lug nuts until no wobble is evident.
 - Torque each wheel lug nut to **150 ft. lbs. in a star pattern** (refer to diagram above).
 - Check torque after first 10 hours of use, and during every maintenance interval.
- Bar code is on the interior of the Tweel[™] tire.
- 2-Way travel machines do not require ballast (except certain models w/ cab or 13' mast).
- Moffett M8 and Princeton 4-Way travel machines \require a Tweel-specific ballast. Moffett M5 4-way travel machines do not require a ballast. Refer to chart on reverse side.
- Contact Equipment Manufacturer for ballast and ballast installation guidelines.
- 4-Way travel Tweel[™], MSPN 05972, will launch in late 2024.
- To optimize traction performance while operating in loose, unpacked sand, it is recommended to feather the throttle and/or lock the differential in accordance with equipment manufacturer guidelines.
- **Always follow the vehicle manufacturer's requirements regarding wheel ballasts for operational stability.**

⚠ WARNING

The maximum speed capability of a vehicle is limited by the lowest speed rated tire on the vehicle. Do not mix sizes on the same axle. Follow manufacturer's recommendations.



MICHELIN X[®] TWEEL[™] TMF AIRLESS RADIAL TIRE ADDITIONAL DETAILS

BACK-SPACING (BOTH MODELS)

Hiab Part Number	Michelin MSPN	Michelin CAI CAD	Size / Description	Bolt Pattern	Offset	Back-Spacing (Standard)	Back-Spacing (Reversed)
060.999.0126	05972	355720_101	31.5X13N16.5 XTWEEL TMF 10-140MM +46MM	10-140 mm	+46 mm	4"	8"
060.999.0127	15204	262815_101	31.5X13N16.5 XTWEEL TMF 10-140MM +13MM	10-140 mm	+13 mm	5-1/4"	6-3/4"




APPROVED MODELS

Brand	Model	Travel	MSPN (Front)	Front Tweels (2)	MSPN (Rear)	Rear Tweel	Tweel Ballast Required
MOFFETT	M5 50.3 NX	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
MOFFETT	M5 50.3P NX	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
MOFFETT	M5 50.4 NX	4-Way	05972	060.999.0126	15204	060.999.0127	n/a
MOFFETT	M5 50.4P NX	4-Way	05972	060.999.0126	15204	060.999.0127	n/a
MOFFETT	M8 55.3 NX	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
MOFFETT	M8 55.3P NX	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
MOFFETT	M8 70.3 NX	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
MOFFETT	M8 55.4 NX	4-Way	05972	060.999.0126	15204	060.999.0127	Front Position
MOFFETT	M8 55.4P NX	4-Way	05972	060.999.0126	15204	060.999.0127	Front Position
PRINCETON	PB55.3+	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
PRINCETON	PB55.3X+	2-Way	15204	060.999.0127	15204	060.999.0127	n/a
PRINCETON	PB55.4+	4-Way	05972	060.999.0126	15204	060.999.0127	Front Position
PRINCETON	PB70.3+	2-Way	15204	060.999.0127	15204	060.999.0127	n/a

WAYS TO INCREASE THE LIFE OF A MICHELIN X[®] TWEEL[™] TMF AIRLESS RADIAL TIRE

- Repair any/all cracked spokes as soon as possible to blunt the crack tip and slow crack growth.
- Refer to Technical Bulletins available from tweel.michelinman.com or contact your local dealer for questions regarding spoke crack repairs.
- **Tweel[™] spokes are not indestructible.** It is important to avoid hard impacts and sharp objects as much as possible.



MICHELIN